



WSLP-240 Series Liquid Polymer Preparation Systems

Equipment Type **Liquid Polymer Preparation Systems**

Description

Liquid Polymer Preparation Systems are designed for long-term, dependable operation. Every design incorporates years of field experience with liquid polymer preparation with the knowledge of the leading manufacturer of water-soluble polymers. All liquid polymer preparation units add two unique options: variable speed mixing and automatic dosage control with constant solution strength to meet a wide range of polymer feed application requirements.

WSLP-240 Series

The WSLP-240 Series use multi-zone mixing. The first zone exposes the polymer to a high energy environment to minimize agglomeration. Reduced mixing energy in the second zone protects the fragile polymer chains from fracturing, making more polymer available for work. The baffling is designed to create a tapered mixing regime. The optional variable speed mixing optimizes the hydration process within each zone regardless of the type of polymer in use. Whether you adjust the output remotely or right at the unit, water flow and polymer feed increase and decrease together, automatically maintaining constant solution strength. Even primary and secondary dilution water is kept at the same ratio as output is adjusted.

Advantages

- Diaphragm, or Progressive Cavity Polymer Pumps
- 0.1 to 660 gph polymer output
- 240 to 12,000 gph water flow rate
- Meters neat emulsion or solution polymers
- Mixes product in-line to begin proper activation
- Variable speed mixer (optional)
- Simple installation and operation
- Low water flow protection
- Self-cleaning check-valve stainless steel
- 304 Stainless steel frame / PVC
- Calibration column

Utilities



- 30-50 psi required primary dilution
- 115VAC/60Hz/1pH or 460VAC/60Hz/3pH or 230VAC/60Hz/1pH
- Connections: 1 to 1 ½' FNPT (water), 1 ¼" FNPT (solution), ½" to 1" NPT (polymer)

Shipping

- 36"W x 41"H x 20"D, 200 lbs, skid mounted

This information is for the specific material described only and may not be valid if the material is used in combination with any other materials or in any other process. To the knowledge of WaterSolve LLC, the information is accurate and reliable, but WaterSolve makes no express or implied warranty of merchantability for the material or for the information. WaterSolve makes no express or implied warranty of fitness for a purpose for the material or for the information.

4964 Starr St. SE, Grand Rapids, MI 49546
office: (616) 575-8693 fax: (616) 575-9031

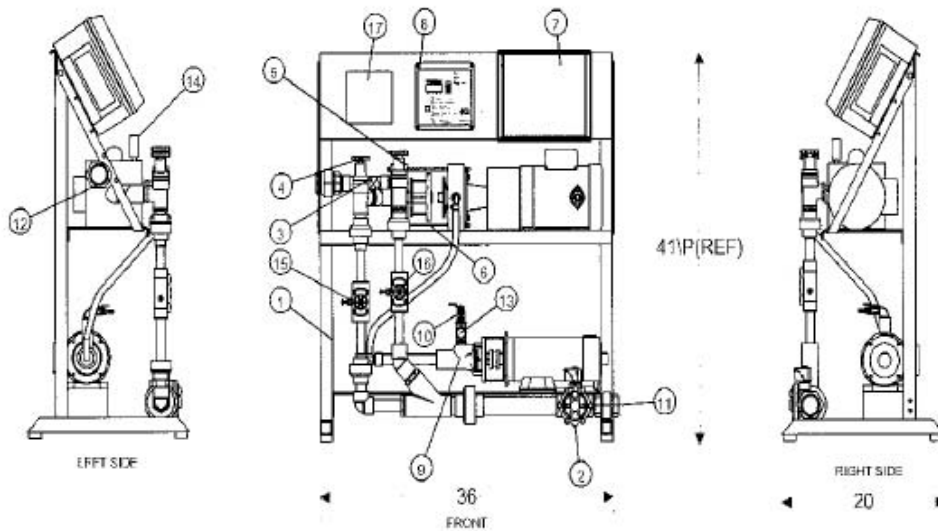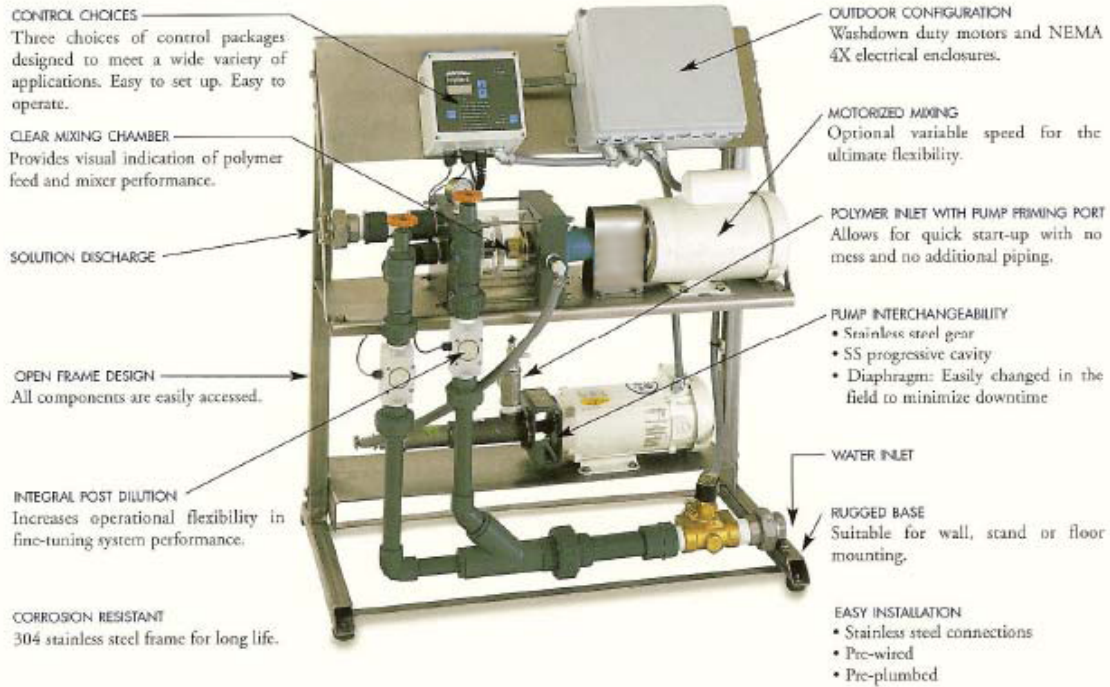

WaterSolve, LLC
Visit us online @ www.gowatersolve.com